




ORTHO
SOLUTIONS
IMPLANTATE TECHNOLOGIE


Perfect Lock LOCKING PLATE SYSTEM DHS SYSTEM LARGE FRAGMENT





Content

Titanium locking DHS plate standard 5,0 mm	4
Titanium locking DCS supracondylar plate 5,0 mm	4
Titanium locking DHS lag screw.....	5
Titanium locking DHS compression screw	5
Titanium narrow locking plate straight 5,0 mm.....	6
Titanium broad locking plate straight 5,0 mm	7
Titanium broad locking plate curved 5,0 mm	8
Titanium proximal lateral tibia locking plate 5,0 m	9
Titanium proximal tibia locking T-plate 5,0 mm.....	10
Titanium proximal tibia locking plate posteromedial 5,0 mm	10
Titanium distal tibia locking plate lateral 5,0 mm.....	11
Titanium proximal tibia locking plate lateral 5,0 mm	11
Titanium distal femoral buttress locking plate 5,0 mm	12
Titanium distal femoral locking plate 5,0 mm	12
Titanium metaphyseal locking plate straight 5,0 mm	13
Titanium locking screw full threaded self-tapping Ø 5,0 mm	14
Titanium locking screw full threaded self-tapping Ø 5,0 mm	15
Titanium cortical screw full threaded self-tapping Ø 4,5 mm	16
Titanium cancellous screw Ø 6,5 mm, full threaded	17
Titanium cancellous screw Ø 6,5 mm, 16mm thread	17
Titanium cancellous screw, Ø 6,5 mm, 32mm thread	19
Titanium distance bolt Ø 5,0 mm.....	20
Titanium Fixation bolt Ø 5,0 mm for cerclage wire.....	20
Titanium washers	20
Perfect Lock Instrument Set	21
Recommended Sterilization container:	22
Centring sleeve Ø 2.0mm.....	23
K-wire Ø 2.0mm.....	23
Direct measuring device	23
Drill bit – AO shaft Ø2,0mm x length 125mm / 100mm.....	23
Drill bit – AO shaft	23
Drill bit AO shaft,.....	23
Malleolar countersink	24
Countersink	24
Small silicon handle.....	24
T-handle small	24
Universal chuck with key	24
Tap AO shaft	24
Tap 6,5mm AO-shaft	24



Threaded drill sleeve	25
Threaded drill sleeve	25
Insert drill sleeve Ø4.5mm / Ø3.2mm	25
Drill guide for 4,5mm / 3,2mm	25
Drill guide for Ø6.5mm / 3.5mm	26
Universal drill sleeve 4,5mm / 3,2mm	26
Universal drill sleeve 4,5mm / 3,2mm	26
Neutral and excentric drill guide short 40mm, 3,2mm / 4,5mm	26
Tap sleeve	26
Tap sleeve Ø4.5mm	26
Pointed drill guide	26
Depth gauge large	27
Large hex. screwdriver	27
Large hexagonal screwdriver	27
Coupling self - holding sleeve	27
Screwdriver AO shaft	27
Torque limited drive 2.5Nm with AO quick coupling	27
Torque limiter	28
Sharp hook	28
Tension device with Gauge	28
Wrench	28
Screw holding forceps large	28
Large bending iron for standard plates 4.5mm	28
Bending pliers	29
Plate bending press	29
Plate bending press	29

Titanium locking DHS plate standard 5,0 mm
Low Contact with combi hole

Used with Titanium Lag Screw and Ø 5.0mm Locking Screws
in Combination with Ø 4.5mm Titanium Standard Cortical Screws
Applicable for Lateral Femoral Neck and Pertrochanteric Fractures

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	6,0 mm
Plate width – Plattenbreite	19,0 mm
Distance hole – Lochabstand	16,0 mm
Barrel length – Zylinderlänge	38,0mm

Item no. Art.Nr.	Angle Winkel	Holes Löcher
4200-3502	135°	2
4200-3503	135°	3
4200-3504	135°	4
4200-3505	135°	5
4200-3506	135°	6
4200-3507	135°	7
4200-3508	135°	8
4200-3510	135°	10
4200-3512	135°	12
4200-3514	135°	14
4200-3516	135°	16




Titanium locking DCS supracondylar plate 5,0 mm
Low contact with combi hole

Used with Titanium lag screw and Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for supracondylar fractures

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	6,0 mm
Plate width – Plattenbreite	17,0 mm
Distance hole – Lochabstand	16,0 mm
Barrel length – Zylinderlänge	25,0mm

Item no. Art.Nr.	Angle Winkel	Holes Löcher
4200-9506	95°	6
4200-9507	95°	7
4200-9508	95°	8
4200-9510	95°	10
4200-9512	95°	12
4200-9514	95°	14
4200-9516	95°	16
4200-9518	95°	18
4200-9520	95°	20
4200-9522	95°	22





Titanium locking DHS lag screw

Used with Titanium DHS and DCS plates

Material – Material	Titanium - Titan
Thread diameter - Gewindedurchmesser	12,7 mm
Thread length – Gewindelänge	22,4 mm

Item no. Art.Nr.	Length Länge
4200-0050	50mm
4200-0055	55mm
4200-0060	60mm
4200-0065	65mm
4200-0070	70mm
4200-0075	75mm
4200-0080	80mm
4200-0085	85mm
4200-0090	90mm
4200-0095	95mm
4200-0100	100mm
4200-0105	105mm
4200-0110	110mm
4200-0115	115mm
4200-0120	120mm
4200-0125	125mm
4200-0130	130mm
4200-0135	135mm
4200-0140	140mm
4200-0145	145mm



Titanium locking DHS compression screw

Used with Titanium DHS and DCS Plates

Material – Material	Titanium - Titan
Thread diameter - Gewindedurchmesser	M4
Thread length – Gewindelänge	36,0 mm

Item no. Art.Nr.	Length Länge
4200-0036	36mm



Titanium narrow locking plate straight 5,0 mm
Low contact with combi hole


Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation of long bones, such as humeral, tibia and femoral,
for peri-prosthetic fractures

Advantage high fixation stability, locking hole left / right = 4° angled

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	4,2 mm
Plate width – Plattenbreite	13,5 mm
Distance hole – Lochabstand	18,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4230-1005	5	98 mm
4230-1006	6	116 mm
4230-1007	7	134 mm
4230-1008	8	152 mm
4230-1009	9	170 mm
4230-1010	10	188 mm
4230-1011	11	206 mm
4230-1012	12	224 mm
4230-1013	13	242 mm
4230-1014	14	260 mm
4230-1015	15	278 mm
4230-1016	15	296 mm
4230-1018	18	332 mm
4230-1020	20	368 mm
4230-1022	22	404 mm
4230-1024	24	440 mm





Titanium broad locking plate straight 5,0 mm
Low contact with combi hole

Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation of long bones, such as humeral, tibia and femoral, for peri-prosthetic fractures

Advantage high fixation stability, locking hole left / right = 4° angled

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	5,2 mm
Plate width – Plattenbreite	17,5 mm
Distance hole – Lochabstand	18,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4231-1006	6	116 mm
4231-1007	7	134 mm
4231-1008	8	152 mm
4231-1009	9	170 mm
4231-1010	10	188 mm
4231-1011	11	206 mm
4231-1012	12	224 mm
4231-1013	13	242 mm
4231-1014	14	260 mm
4231-1015	15	278 mm
4231-1016	16	296 mm
4231-1018	18	332 mm
4231-1020	20	368 mm
4231-1022	22	404 mm
4231-1024	24	440 mm



Titanium broad locking plate curved 5,0 mm
Low contact with combi hole


Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation of femoral bone - shaft fractures

Advantage high fixation stability, locking hole left / right = 4° angled

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	5,2 mm
Plate width – Plattenbreite	17,5 mm
Distance hole – Lochabstand	18,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4231-2006	6	116 mm
4231-2007	7	134 mm
4231-2008	8	152 mm
4231-2009	9	170 mm
4231-2010	10	188 mm
4231-2011	11	206 mm
4231-2012	12	224 mm
4231-2013	13	242 mm
4231-2014	14	260 mm
4231-2015	15	278 mm
4231-2016	16	296 mm
4231-2018	18	332 mm
4231-2020	20	368 mm
4231-2022	22	404 mm
4231-2024	24	440 mm






Titanium proximal lateral tibia locking plate 5,0 mm

Used with Titanium Ø 5.0mm locking Screws
in Combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation of tibia fractures with associated shaft fractures.

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	4,2 mm
Plate width shaft – Plattenbreite Schaft	16,2 mm
Plate width head – Plattenbreite Kopf	43,40 mm
Distance hole – Lochabstand	18,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4252-1104	4 Holes LEFT	82 mm
4252-1106	6 Holes LEFT	118 mm
4252-1108	8 Holes LEFT	154 mm
4252-1110	10 Holes LEFT	190 mm
4252-1112	12 Holes LEFT	226 mm
4252-1114	14 Holes LEFT	262 mm
4252-1116	16 Holes LEFT	298 mm
4252-1204	4 Holes RIGHT	82 mm
4252-1206	6 Holes RIGHT	118 mm
4252-1208	8 Holes RIGHT	154 mm
4252-1210	10 Holes RIGHT	190 mm
4252-1212	12 Holes RIGHT	226 mm
4252-1214	14 Holes RIGHT	262 mm
4252-1216	16 Holes RIGHT	298 mm

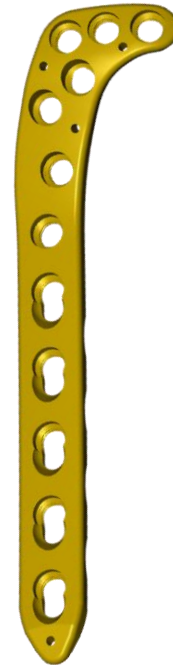

Titanium proximal tibia locking T-plate 5,0 mm

Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation of buttress metaphyseal fractures, proximal Humeral,
medial tibia plateau and distal tibia fractures with associated shaft fractures

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	2,5 mm
Plate width shaft – Plattenbreite Schaft	16,7 mm
Plate width head – Plattenbreite Kopf	33,5 mm
Distance hole – Lochabstand	16,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4250-0034	4	81 mm
4250-0035	5	97mm
4250-0036	6	113 mm
4250-0037	7	129 mm
4250-0038	8	145 mm




Titanium proximal tibia locking plate posteromedial 5,0 mm

Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for Fixation of the tibia lateral wedge, depression, bicondylar and fractures
with associated shaft fractures

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	2,9 mm
Plate width – Plattenbreite	14,7 mm
Distance hole – Lochabstand	15,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4256-0104	4 Holes LEFT	96 mm
4256-0106	6 Holes LEFT	126 mm
4256-0108	8 Holes LEFT	156 mm
4256-0110	10 Holes LEFT	186 mm
4256-0204	4 Holes RIGHT	96 mm
4256-0206	6 Holes RIGHT	126 mm
4256-0208	8 Holes RIGHT	156 mm
4256-0210	10 Holes RIGHT	186 mm





Titanium distal tibia locking plate lateral 5,0 mm

Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation of tibia fractures with associated shaft fractures.

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	4,0 mm
Plate width – Plattenbreite	15,1 mm
Distance hole – Lochabstand	15,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4260-0105	5 Holes LEFT	121 mm
4260-0106	6 Holes LEFT	136 mm
4260-0108	8 Holes LEFT	166 mm
4260-0110	10 Holes LEFT	196 mm
4260-0112	12 Holes LEFT	226 mm
4260-0205	5 Holes RIGHT	121 mm
4260-0206	6 Holes RIGHT	136 mm
4260-0208	8 Holes RIGHT	166 mm
4260-0210	10 Holes RIGHT	196 mm
4260-0212	12 Holes RIGHT	226 mm



Titanium proximal tibia locking plate lateral 5,0 mm

Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation for corrective osteotomy (closed wedge),
as well as for lateral treatment of proximal fractures of the tibia

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	2,9 mm
Plate width – Plattenbreite	15,0 mm
Distance Hole – Lochabstand	15,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4254-0105	5 Holes LEFT	116 mm
4254-0107	7 Holes LEFT	146 mm
4254-0109	9 Holes LEFT	176 mm
4254-0111	11 Holes LEFT	206 mm
4254-0113	13 Holes LEFT	236 mm
4254-0205	5 Holes RIGHT	116 mm
4254-0207	7 Holes RIGHT	146 mm
4254-0209	9 Holes RIGHT	176 mm
4254-0211	11 Holes RIGHT	206 mm
4254-0213	13 Holes RIGHT	236 mm



Titanium distal femoral buttress locking plate 5,0 mm with Combi Hole

Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation for buttressing multi fragmental distal femoral fractures

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	5,7 mm
Plate width shaft – Plattenbreite Schaft	16,5 mm
Plate width head– Plattenbreite Kopf	39,1 mm
Distance hole – Lochabstand	20,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4240-0105	5 Holes LEFT	164 mm
4240-0107	7 Holes LEFT	204 mm
4240-0109	9 Holes LEFT	244 mm
4240-0111	11 Holes LEFT	284 mm
4240-0113	13 Holes LEFT	324 mm
240-0205	5 Holes RIGHT	164 mm
4240-0207	7 Holes RIGHT	204 mm
4240-0209	9 Holes RIGHT	244 mm
4240-0211	11 Holes RIGHT	284 mm
4240-0213	13 Holes RIGHT	324 mm




Titanium distal femoral locking plate 5,0 mm with combi hole

Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
applicable for fixation for buttressing multi fragmental distal femur fractures

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	5,5 mm
Plate width shaft – Plattenbreite Schaft	17,4 mm
Plate width head– Plattenbreite Kopf	33,0 mm
Distance hole – Lochabstand	20,0 mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4242-0105	5 Holes LEFT	156 mm
4242-0107	7 Holes LEFT	196 mm
4242-0109	9 Holes LEFT	236 mm
4242-0111	11 Holes LEFT	276 mm
4242-0113	13 Holes LEFT	316 mm
4242-0205	5 Holes RIGHT	156 mm
4242-0207	7 Holes RIGHT	196 mm
4242-0209	9 Holes RIGHT	236 mm
4242-0211	11 Holes RIGHT	276 mm
4242-0213	13 Holes RIGHT	316 mm





Titanium metaphyseal locking plate straight 5,0 mm

Used with Titanium Ø 5.0mm locking screws
in combination with Ø 4.5mm Titanium standard cortical screws
Applicable for fixation for buttressing multi fragmental metaphyseal fractures

Material – Material	Titanium - Titan
Plate thickness - Plattendicke	4,20mm
Plate width shaft – Plattenbreite Schaft	13,50mm
Distance hole – Lochabstand	10,0 - 18,0mm

Item no. Art.Nr.	Holes Löcher	Length Länge
4270-0008	8 Holes	118 mm
4270-0009	9 Holes	136 mm
4270-0010	10 Holes	154 mm
4270-0011	11 Holes	172 mm
4270-0012	12 Holes	190 mm
4270-0013	13 Holes	208 mm
4270-0014	14 Holes	226 mm
4270-0016	16 Holes	262 mm
4270-0018	18 Holes	298 mm
4270-0020	20 Holes	334 mm



**Titanium locking screw full threaded self-tapping Ø 5,0 mm
Hexagonal socket width 3,5mm, gold**


Applicable drill bit for thread hole Ø 4.3mm, Length 195mm calibrated

Note: tapping is not applicable for this screw!

Material – Material	Titanium - Titan
Head thread – Kopfgewinde	M7
Cortical thread – Kortikalisgewinde	5,0 mm
Core diameter – Kerndurchmesser	4,3 mm
Thread pitch – Gewindesteigung	1,0 mm

Item no. Art.Nr.	Diameter Durchmesser	Length Länge
4285-0514	5,0 mm	14 mm
4285-0516	5,0 mm	16 mm
4285-0518	5,0 mm	18 mm
4285-0520	5,0 mm	20 mm
4285-0522	5,0 mm	22 mm
4285-0524	5,0 mm	24 mm
4285-0526	5,0 mm	26 mm
4285-0528	5,0 mm	28 mm
4285-0530	5,0 mm	30 mm
4285-0532	5,0 mm	32 mm
4285-0534	5,0 mm	34 mm
4285-0536	5,0 mm	36 mm
4285-0538	5,0 mm	38 mm
4285-0540	5,0 mm	40 mm
4285-0542	5,0 mm	42 mm
4285-0544	5,0 mm	44 mm
4285-0546	5,0 mm	46 mm
4285-0548	5,0 mm	48 mm
4285-0550	5,0 mm	50 mm
4285-0555	5,0 mm	55 mm
4285-0560	5,0 mm	60 mm
4285-0565	5,0 mm	65 mm
4285-0570	5,0 mm	70 mm
4285-0575	5,0 mm	75 mm
4285-0580	5,0 mm	80 mm
4285-0585	5,0 mm	85 mm
4285-0590	5,0 mm	90 mm
4285-0595	5,0 mm	95 mm
4285-0600	5,0 mm	100 mm





**Titanium locking screw full threaded self-tapping Ø 5,0 mm
Hexagonal socket width 3,5mm, polyaxial, grey**

Applicable drill bit for thread hole Ø 4.3mm, length 195mm calibrated

Note: Tapping is not applicable for this screw!

Material – Material	Titanium - Titan
Head thread – Kopfgewinde	M7
Cortical thread – Kortikalisgewinde	5,0 mm
Core diameter – Kerndurchmesser	4,4 mm
Thread pitch – Gewindesteigung	1,0 mm

Item no. Art.Nr.	Diameter Durchmesser	Length Länge
4285-1514	5,0 mm	14 mm
4285-1516	5,0 mm	16 mm
4285-1518	5,0 mm	18 mm
4285-1520	5,0 mm	20 mm
4285-1522	5,0 mm	22 mm
4285-1524	5,0 mm	24 mm
4285-1526	5,0 mm	26 mm
4285-1528	5,0 mm	28 mm
4285-1530	5,0 mm	30 mm
4285-1532	5,0 mm	32 mm
4285-1534	5,0 mm	34 mm
4285-1536	5,0 mm	36 mm
4285-1538	5,0 mm	38 mm
4285-1540	5,0 mm	40 mm
4285-1542	5,0 mm	42 mm
4285-1544	5,0 mm	44 mm
4285-1546	5,0 mm	46 mm
4285-1548	5,0 mm	48 mm
4285-1550	5,0 mm	50 mm
4285-1555	5,0 mm	55 mm
4285-1560	5,0 mm	60 mm
4285-1565	5,0 mm	65 mm
4285-1570	5,0 mm	70 mm
4285-1575	5,0 mm	75 mm
4285-1580	5,0 mm	80 mm
4285-1585	5,0 mm	85 mm
4285-1590	5,0 mm	90 mm
4285-1595	5,0 mm	95 mm
4285-1600	5,0 mm	100 mm




**Titanium cortical screw full threaded self-tapping Ø 4,5 mm
Hexagonal socket width 3,5mm, gold**

Material – Material	Titanium - Titan
Head diameter – Kopfdurchmesser	8,0mm
Cortical thread – Kortikalisgewinde	4,5 mm
Core diameter – Kerndurchmesser	3,2 mm
Thread pitch – Gewindesteigung	1,75 mm

Item no. Art.Nr.	Diameter Durchmesser	Length Länge
6164-0512	4,5 mm	12 mm
6164-0514	4,5 mm	14 mm
6164-0516	4,5 mm	16 mm
6164-0518	4,5 mm	18 mm
6164-0520	4,5 mm	20 mm
6164-0522	4,5 mm	22 mm
6164-0524	4,5 mm	24 mm
6164-0526	4,5 mm	26 mm
6164-0528	4,5 mm	28 mm
6164-0530	4,5 mm	30 mm
6164-0532	4,5 mm	32 mm
6164-0534	4,5 mm	34 mm
6164-0536	4,5 mm	36 mm
6164-0538	4,5 mm	28 mm
6164-0540	4,5 mm	40 mm
6164-0542	4,5 mm	42 mm
6164-0544	4,5 mm	44 mm
6164-0546	4,5 mm	46 mm
6164-0548	4,5 mm	48 mm
6164-0550	4,5 mm	50 mm
6164-0552	4,5 mm	52 mm
6164-0554	4,5 mm	54 mm
6164-0556	4,5 mm	56 mm
6164-0558	4,5 mm	58 mm
6164-0560	4,5 mm	60 mm
6164-0562	4,5 mm	62 mm
6164-0564	4,5 mm	64 mm
6164-0565	4,5 mm	65 mm
6164-0570	4,5 mm	70 mm
6164-0575	4,5 mm	75 mm
6164-0580	4,5 mm	80 mm
6164-0585	4,5 mm	85 mm
6164-0590	4,5 mm	90 mm
6164-0595	4,5 mm	95 mm
6164-0600	4,5 mm	100 mm





**Titanium cancellous screw Ø 6,5 mm, full threaded
Hexagonal socket width 3,5mm, gold**

Material – Material	Titanium - Titan
Head diameter – Kopfdurchmesser	8,0mm
Cancellous thread – Spongiosagewinde	6,5 mm
Core diameter – Kerndurchmesser	3,0 mm
Thread pitch – Gewindesteigung	2,75 mm

Item no. Art.Nr.	Diameter Durchmesser	Length Länge
6174-0025	6,5mm	25
6174-0030	6,5mm	30
6174-0035	6,5mm	35
6174-0040	6,5mm	40
6174-0045	6,5mm	45
6174-0050	6,5mm	50
6174-0055	6,5mm	55
6174-0060	6,5mm	60
6174-0065	6,5mm	65
6174-0070	6,5mm	70
6174-0075	6,5mm	75
6174-0080	6,5mm	80
6174-0085	6,5mm	85
6174-0090	6,5mm	90
6174-0095	6,5mm	95
6174-0100	6,5mm	100




**Titanium cancellous screw Ø 6,5 mm, 16mm thread
Hexagonal socket width 3,5mm, gold**

Material – Material	Titanium - Titan
Head diameter – Kopfdurchmesser	8,0mm
Cancellous thread – Spongiosagewinde	6,5 mm
Core diameter – Kerndurchmesser	3,0 mm
Thread pitch – Gewindesteigung	2,75 mm

Item no. Art.Nr.	Diameter Durchmesser	Length Länge
6174-1025	6,5mm	25
6174-1030	6,5mm	30
6174-1035	6,5mm	35
6174-1040	6,5mm	40
6174-1045	6,5mm	45
6174-1050	6,5mm	50
6174-1055	6,5mm	55
6174-1060	6,5mm	60
6174-1065	6,5mm	65
6174-1070	6,5mm	70
6174-1075	6,5mm	75
6174-1080	6,5mm	80
6174-1085	6,5mm	85
6174-1090	6,5mm	90
6174-1095	6,5mm	95
6174-1100	6,5mm	100





**Titanium cancellous screw, Ø 6,5 mm, 32mm thread
Hexagonal socket width 3,5mm, gold**

Material – Material	Titanium - Titan
Head diameter – Kopfdurchmesser	8,0mm
Cancellous thread – Spongiosagewinde	6,5 mm
Core diameter – Kerndurchmesser	3,0 mm
Thread pitch – Gewindesteigung	2,75 mm

Item no. Art.Nr.	Diameter Durchmesser	Length Länge
6174-3045	6,5mm	45
6174-3050	6,5mm	50
6174-3055	6,5mm	55
6174-3060	6,5mm	60
6174-3065	6,5mm	65
6174-3070	6,5mm	70
6174-3075	6,5mm	75
6174-3080	6,5mm	80
6174-3085	6,5mm	85
6174-3090	6,5mm	90
6174-3095	6,5mm	95
6174-3100	6,5mm	100



Titanium distance bolt Ø 5,0 mm
Hexagonal socket width 3,5mm, blue

Material – Material	Titanium - Titan
Head thread – Kopfgewinde	M7
Thread pitch – Gewindesteigung	1,0 mm

Item no. Art.Nr.	Diameter Durchmesser	Length Länge
4288-0035	7,0	5,0



Titanium Fixation bolt Ø 5,0 mm for cerclage wire
Hexagonal socket width 3,5mm, grey

Material – Material	Titanium - Titan
Head thread – Kopfgewinde	M7
Thread pitch – Gewindesteigung	1,0 mm

Item no. Art.Nr.	Diameter Durchmesser	Length Länge
4288-0100	7,0	5,0




Titanium washers

Titanium washer used for standard titanium screws

Material – Material	Titanium - Titan
---------------------	------------------

Item no. Art.Nr.	Diameter Durchmesser	Colour Farbe
6188-0010	5,0 / 10,0	Blue
6188-0013	6,8 / 13,0	Blue
6188-0016	6,8 / 16,0	Blue
6188-0019	6,8 / 19,0	blue






Perfect Lock Instrument Set

SET 4299-0010S

Set – listing – content: Instruments


Item no. Art. Nr.	Description Bezeichnung	Pcs Stück
4299-0010	Tray Perfect-Lock large fragment basic instruments (Graphic case)	1
6990-0020	Drill bit – AO shaft Ø3.2mm x length 145mm / 120mm	2
6990-0030	Drill bit – AO shaft Ø4.5mm x length 145mm / 120mm	2
6990-0380	Countersink Ø4.5mm with T-handle and tip	1
6990-0460	Tap AO shaft Ø4.5mm with cortical pitch 1.75mm used for Ø4.5mm cortical screws	1
6990-0512	Insert drill sleeve Ø4.5mm / Ø3.2mm	1
6990-0830	T-handle small with AO – quick coupling	1
6990-0586	Tap sleeve Ø3.2mm, also use as Ø3.2mm drill guide	1
6990-0630	Large hex. screw driver – AO shaft standard (hex. flats 3.5mm) used for Ø4.5mm / Ø6.5mm screws	1
6990-0662	Large hexagonal screw driver used for self-holding sleeve	1
6990-0760	Coupling self – holding sleeve for screw driver	1
6990-0592	Tap sleeve Ø4.5mm	1
6990-0932	Depth gauge large, extra-long for measurement 120mm used for Ø4.5mm and Ø6.5mm screws	1
4290-0044	K-wire Ø2.0mm x length 190mm	10
6990-0060	Drill bit AO shaft Ø4.3mm x length 195mm, calibrated used for 5.0mm locking plate system	2
4290-0030	Threaded drill guide Ø4.3mm for used drill bit Ø4.3mm	2
4290-0042	Centring sleeve Ø2.0mm for used K-wire Ø2.0mm x length 190mm	2
4290-0040	Direct measuring device for used K-wire Ø2.0mm x length 190mm	1
4290-0010	Torque limited drive 2.5N with AO quick coupling	1

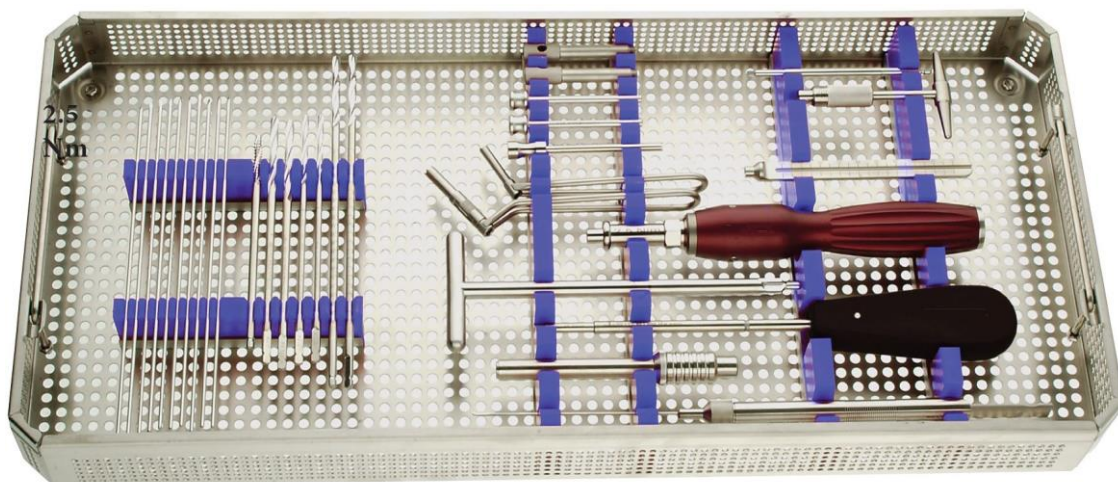

Recommended Sterilization container:



Item no. Art. Nr.	Description Bezeichnung
6000-9000	1/1 Size container, bottom non perforated outside 580 x 280 x100mm



Centring sleeve Ø 2.0mm

Used for 190 mm K-wire REF. 4290-0044

Item no. Art. Nr.	Description Bezeichnung
4290-0042	Centring sleeve ø 2,0



K-wire Ø 2.0mm

Used for Centring sleeve REF. 4290-0042

Item no. Art. Nr.	Description Bezeichnung
4290-0044	ø 2,0 x 190 mm K-wire



Direct measuring device

Used for K-Wire REF. 4290-0044

Item no. Art. Nr.	Description Bezeichnung
4290-0040	Direct measuring device



Drill bit – AO shaft Ø2,0mm x length 125mm / 100mm

Used for ø 2,0 mm K-wire

Item no. Art. Nr.	Description Bezeichnung
6990-0010	Drill bit – AO shaft Ø2,0mm x length 125mm / 100mm



Drill bit – AO shaft

Used for ø 4,5 mm cortical screws

Item no. Art. Nr.	Description Bezeichnung
6990-0020	Ø3.2mm x length 145mm / 120mm
6990-0030	Ø4.5mm x length 145mm / 120mm



Drill bit AO shaft,

Used for Threaded drill sleeve REF. 4290-0030 + REF. 4290-0031

For 5,0 mm locking screws

Item no. Art. Nr.	Description Bezeichnung
6990-0060	Ø4.3mm x 195mm





Malleolar countersink

Item no.	Description
Art. Nr.	Bezeichnung
6990-0322	Malleolar countersink Ø3.2mm, quick coupling



Countersink

Used for Ø 4,5 mm cortical screws and 6,5mm cancellous screws

Item no.	Description
Art. Nr.	Bezeichnung
6990-0380	Countersink Ø4.5mm with T-handle and tip



Small silicon handle

Item no.	Description
Art. Nr.	Bezeichnung
6990-0822	Small silicon handle 19x95mm, AO-coupling



T-handle_small

Item no.	Description
Art. Nr.	Bezeichnung
6990-0830	T-handle small with AO - quick coupling



Universal chuck with key

Item no.	Description
Art. Nr.	Bezeichnung
6990-0840	Universal chuck with key cannulated 4,1mm




Tap AO shaft

Used for Ø 4,5 mm cortical screws

Item no.	Description
Art. Nr.	Bezeichnung
6990-0460	Tap AO shaft Ø4,5mm with cortical pitch 1.75mm



Tap 6,5mm AO-shaft



Used for $\varnothing$ 6,5 mm cancellous screws

Item no. Art. Nr.	Description Bezeichnung
6990-0470	Tap 6,5mm AO-shaft pitch 2,75mm



Threaded drill sleeve

Used for $\varnothing$ 4,3 mm Drill Bit REF.: 6990-0060

Item no. Art. Nr.	Description Bezeichnung
4290-0030	Threaded Drill Guide $\varnothing$ 4,3 mm for standard locking screws



Threaded drill sleeve

Used for $\varnothing$ 4,3 mm Drill Bit REF.: 6990-0060

Item no. Art. Nr.	Description Bezeichnung
4290-0031	Threaded drill sleeve for polyaxial locking screws



Insert drill sleeve $\varnothing$ 4.5mm / $\varnothing$ 3.2mm

Used for reduction from $\varnothing$ 4,5 mm to $\varnothing$ 3,2mm

Item no. Art. Nr.	Description Bezeichnung
6990-0512	Insert drill sleeve $\varnothing$ 4.5mm / $\varnothing$ 3.2mm



Drill guide for 4,5mm / 3,2mm

Used for $\varnothing$ 4,5 mm Cortical screws

Item no. Art. Nr.	Description Bezeichnung
6990-0538	Drill guide for 4,5mm / 3,2mm



Drill guide for Ø6.5mm / 3.5mm

Used for Ø 6,5 mm Screws and Ø 3,5 mm drill bit

Item no. Art. Nr.	Description Bezeichnung
6990-0552	Drill guide for Ø6.5mm / 3.5mm



Universal drill sleeve 4,5mm / 3,2mm

Used for Ø 4,5 mm Cortical screws

Item no. Art. Nr.	Description Bezeichnung
6990-0564	Universal drill sleeve 4,5mm / 3,2mm



Neutral and excentric drill guide short 40mm, 3,2mm / 4,5mm

Used for Ø 4,5 mm Cortical screws

Item no. Art. Nr.	Description Bezeichnung
6990-0576	Neutral and excentric drill guide short 40mm, 3,2mm / 4,5mm



Tap sleeve

Used for Ø 4,5 mm Cortical screws

Item no. Art. Nr.	Description Bezeichnung
6990-0586	Tap sleeve Ø3,2mm, also use as Ø3,2mm drill guide



Tap sleeve Ø4.5mm


Item no. Art. Nr.	Description Bezeichnung
6990-0592	Tap sleeve Ø4.5mm



Pointed drill guide

Item no. Art. Nr.	Description Bezeichnung
6990-0596	Pointed drill guide





Depth gauge large

Used for $\varnothing$ 4,5 mm Cortical and $\varnothing$ 6,5 mm cancellous screws

Item no. Art. Nr.	Description Bezeichnung
6990-0932	Depth gauge large, extra-long for measurement 120mm



Large hex. screwdriver

Used for $\varnothing$ 4,5 mm Cortical and $\varnothing$ 6,5 mm cancellous screws

Item no. Art. Nr.	Description Bezeichnung
6990-0630	Large hex. screwdriver – AO shaft standard (hex. flats 3.5mm)



Large hexagonal screwdriver

Used for $\varnothing$ 4,5 mm Cortical screws, with self-holding sleeve REF 6990-0760

Item no. Art. Nr.	Description Bezeichnung
6990-0662	Large hexagonal screwdriver useable with self-holding sleeve



Coupling self - holding sleeve

Used for $\varnothing$ 4,5 mm Cortical and $\varnothing$ 6,5 mm, $\varnothing$ 7,0 cancellous screws
And screwdriver RE. 6990-0662


Item no. Art. Nr.	Description Bezeichnung
6990-0760	Coupling self - holding sleeve for screwdriver REF. 6990-0662



Screwdriver AO shaft

Used for $\varnothing$ 5,0 mm Locking screws

Item no. Art. Nr.	Description Bezeichnung
4290-0020	Screwdriver AO shaft hex. 3,5mm Large hex.




Torque limited drive 2.5Nm with AO quick coupling

Item no. Art. Nr.	Description Bezeichnung
4290-0010	Torque limited drive 2.5Nm with AO quick coupling



Torque limiter

Item no.	Description
Art. Nr.	Bezeichnung
4290-0012	Torque limiter 4 Nm AO coupling

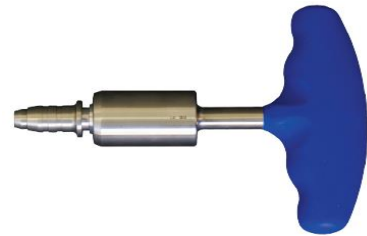

Sharp hook

Item no.	Description
Art. Nr.	Bezeichnung
6990-1400	Sharp hook, length, 155mm



Tension device with Gauge

Item no.	Description
Art. Nr.	Bezeichnung
6990-1800	Tension device with Gauge



Wrench

Item no.	Description
Art. Nr.	Bezeichnung
6990-1810	Wrench, 11mm



Screw holding forceps large

Used for $\varnothing$ 3,5 to 6,5mm mm


Item no.	Description
Art. Nr.	Bezeichnung
6990-1510	Screw holding forceps large



Large bending iron for standard plates 4.5mm

Item no.	Description
Art. Nr.	Bezeichnung
6990-1232	Large bending iron for standard plates 4.5mm






Bending pliers

Item no.	Description
Art. Nr.	Bezeichnung
6990-1250	Bending pliers



Plate bending press


Item no.	Description
Art. Nr.	Bezeichnung
6990-1260	Plate bending press

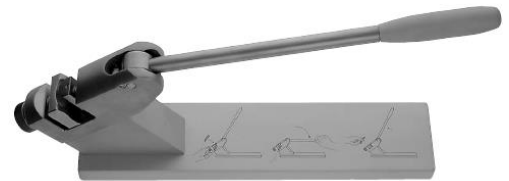

[illegible]



**ORTHO
SOLUTIONS**
IMPLANTATE TECHNOLOGIE



**ORTHO
SOLUTIONS**
IMPLANTATE TECHNOLOGIE

Ortho Solutions GmbH
Eltastraße 2
D-78573 Wurmlingen

Phone +49(0)7461 - 96357 - 0
Fax +49(0)7461 - 96357 - 99
www.orthosolutions.de
info@orthosolutions.de